



## Feature Highlight

4K LED, 2600 ANSI Lumens  
 Rec.709 98% support MEMC, HDR10+, 3D, Auto Cinema Mode  
 12W x 2 stereo chamber speakers support Dolby Digital, Dolby Digital Plus  
 Auto Focus, Auto 2D Keystone & Rotation  
 Auto fit to Screen, Avoid Obstacles, Digital Zoom, Image Reposition  
 USB-C support PD out & DP Alt Mode, Switch charging & display  
 HDMI 2.1 support eARC, ALLM  
 Google TV with official Netflix

## GP520



### Display

Projection System	DLP 6540
DMD type	0.47"
Native Resolution	3840 x 2160 pixels
Brightness	2600 ANSI Lumens
Contrast Ratio*	200,000:1
Display Color	1.07 billion colors
Aspect Ratio	Native 16:9
Light Source life*	20,000/30,000 hrs (normal/eco)

### Optical

Throw Ratio	1.2
Zoom Ratio	Fix
Keystone Correction	(Auto) Vertical±20°, Horizontal±40°, Rotations30° (Manual) Vertical±40°, Horizontal±40°, Rotations30°
Projection Offset	100%
Projection Size (Clear Image Size)	50"-180"(50"-112")

### Audio

Built-in Speaker	12W x 2 stereo chamber speakers
------------------	---------------------------------

### Special Feature

### Feature

4K LED, 2600 ANSI Lumens  
 Rec.709 98%, support MEMC, 3D, HDR10+, Auto Cinema Mode  
 12W x 2 Speaker support Dolby Digital, Dolby Digital Plus, BT Speaker Mode, Audio-Only Mode  
 Auto Focus, Auto 2D Keystone & Rotation, Auto fit to Screen, Avoid Obstacles, Digital Zoom, Image Reposition  
 USB-C x1 : support PD out & DP Alt Mode, Switch charging & display, media reader  
 HDMI 2.1 x2: (1)support ALLM, (2)support ALLM, eARC  
 USB-A 2.0 x2: (1)For service only, Don't support 5V power supply (2)Power supply(up to 5V/1.5A), USB reader  
 GTV Support Official Netflix, BT 5.2, Wifi 6.0(not support 6e channel)

### Compatibility

Resolution Support	VGA (640 x 480) to 4K UHD (3840 x 2160)
--------------------	---

### Power

Power Consumption	Typical 186W, Max 250.08W
Standby Power Consumption	Max. 0.5W
Power Supply	AC 100 to 240V, 50/60 Hz

### Dimension and Weight

Product Dimensions (WxHxD)	241.3 x 151.0 x 225.0 mm/9.49 x 5.94 x 8.86 in
Product Weight	3.7kg/8.2lb

### Operation Condition

Noise Level(Normal/Eco)	26dBA/24dBA
Operating Temperature	0 - 40°C

### Accessories

Accessories (Standard)	Power Adaptor x 1 Power Cord (depends on SKL) x 1 Remote Control (RC4079) x 1 Quick Start Guide x 1 Warranty Card (by region)
------------------------	---

Accessories (Optional)	CM00G3 Ceiling Mount
------------------------	----------------------

### OSD

On Screen Display Language	16 languages
----------------------------	--------------


### Environment Notice

\*Lamp life results will vary depending on environmental conditions and usage. Actual products features and specifications are subject to change without notice.

\* The Contrast is measure by Full On Full Off standard.




Connectivity




No	I/O Name	Quantity
1	USB-A Service	1
2	USB-A USB Reader	1
3	USB-C DP	1
4	HDMI 1(HDMI2.1)	1
5	HDMI 2 Audio Return+(HDMI2.1)	1
5	Audio out	1

Installation

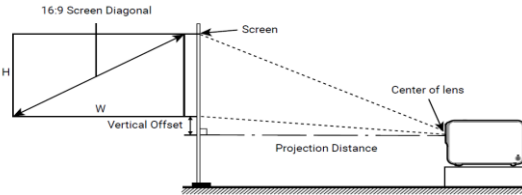

Screen size		W(mm)	H(mm)	Distance from screen(mm)
Inch	mm			
50	1270	1107	623	1328
60	1524	1328	747	1594
70	1778	1550	872	1860
80	2032	1771	996	2125
90	2286	1992	1121	2391
100	2540	2214	1245	2657
110	2794	2435	1370	2922
120	3048	2657	1494	3188
130	3302	2878	1619	3454
140	3556	3099	1743	3719
150	3810	3321	1868	3985
160	4064	3542	1992	4250
170	4318	3763	2117	4516
180	4572	3985	2241	4782

Dimension(Ceiling Mounts, Tripod Screw Holes)

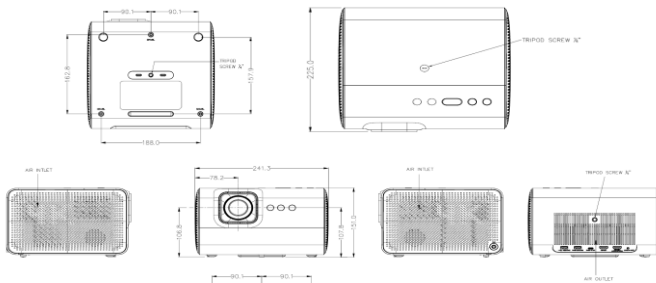

Feature Icons

