



Model Name **GP10 Ultra Lite LED Projector**

Unique selling point

- * 500AL LED, 100% NTSC
- * Detachable DVD dock
- * 1.2 throw ratio (40" @ 1M)
- * 3W stereo speakers x2 + SRS HD
- * Auto Blank (Eye protection)
- * Wireless Display
- * DLP 3D (DLP Link)

Trade Mark




Projection System	DLP	
Native Resolution	WXGA(1280 x 800)	
Brightness	500AL	
Contrast Ratio	10000 : 1	
Display Color	1.07 Billion Colors	
Lens	F=1.65, F=11.7mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	1.2:1 (40" @ 1M)	
Image Size (Diagonal)	20"~240"	
Zoom Ratio	Fixed	
Lamp Type	Luminus PT54	
Lamp(Normal/Economic)*	20,000/30,000 hours	
Keystone Adjustment	1D, Vertical +/- 40 degrees	
Projection Offset	100%±5%	
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)	
Horizontal Frequency	31 ~ 85KHz	
Vertical Scan Rate	23 ~ 86 Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC / NTSC4.43 / PAL / M-PAL / N-PAL / PAL60 / SECAM / HDTV
	3D Compatibility	PC: 120Hz Frame Sequential 3D for resolutions up to WXGA, PC: 60Hz Top-bottom 3D for resolutions up to SXGA+ Video: 60Hz Frame Sequential 3D for resolutions up to 480i
Interface	Computer in (D-sub 15pin)	x 1 (share with Component)
	Composite Video in	x 1 (3.5mm)
	Component Video in	No
	HDMI (v1.3)	x 1
	Audio in (Mini Jack)	x 1 (3.5mm)
	Audio out (Mini Jack)	x 1 (3.5mm)
	Speaker	3W (Amp. 2W) x2 (w/ SRS)
	USB (Type A)	x 1 (USB Drive/HDD/Wi-Fi dongle)
	USB (Type Mini B)	x 1 (USB Display/File transfer)
	Card Reader	x 1 (SD, SDHC up to 32GB)
	Internal memory	2GB (1.66 GB for user usage)
Dimensions (W x H x D)	220mm x 177mm x 61.8mm (w/o DVD) , 220mm x 177mm x 95.0mm (w/ DVD)	
Weight	1.5kg (0.67 pounds)	
Auto Blank	Effective distance : 20 cm ~ 30cm (Vary with different ambient light and the color of reflected object)	
Power	Power Supply	AC 100 to 240 V, 50/60 Hz
	Power Consumption	128W/95W (Typical/Eco) , Standby<0.5W
Audible Noise	36/32 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic / Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/ Hindi / Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai / Traditional Chinese (28 Languages) Arabic / Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/ Hindi / Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai / Traditional Chinese (28 Languages)	
Picture Modes	Bright/Standard/Cinema/Game/User	
Accessories	Standard	Optional
	Remote Control w/ Battery	DVD PLAYER US/CA PRJ GP10 SJJ3F14.A01 (for A)
	Power Cord (by region)	DVD PLAYER EU/JP/ZA/ME PRJ GP10 SJJ3F14.E01 (for E, JP), S(ME)
	Carry Bag	DVD PLAYER KR/TW/MY/SG/TH/ID/VN/HK PRJ GP10 SJJ3F14.F01 (for K(KR), T(TW), S (MY, SG), F (TH, ID, VN), E(HK))
	User Manual (24L, in flash)	DVD PLAYER AU/NZ/LA PRJ GP10 SJJ3F14.P01 (for P(AU), L)
	Quick Start Guide (18L)	DVD PLAYER LA PRJ GP10 SJJ3F14.L01 (for L)
	Warranty Card (by region)	DVD PLAYER IN/ME PRJ GP10 SJJ3F14.D01 (for D(IN), S(ME))
	Wi-Fi dongle	DVD PLAYER CH PRJ GP10 SJJ3F14.C01 (for C) SJJ0T14.011
Multimedia Support Format	Video	AVI (Xvid, MJPEG), MKV (XVID), DVIX (MJPEG, XVID), DAT (MPEG1), MPG(MPEG1), MPEG(MPEG1)
	Music	MP3, MP2, MP1, OGG, AAC, WAV
	Photo	JPG (.jpg, .jpeg) , BMP (.bmp)
	Subtitle	SRT (.srt) , SMI (.smi) (TBC) [Only support UTF (unicode).]
	Document	Adobe PDF 1.0~1.4 (.pdf), MS Power Point 97~2010, Office XP (.ppt, .ppsx), MS Excel 95 ~ 2010, Office XP (.xls, .xlsx) MS Word 95~2010, Office XP (.doc, .docx)
Wireless & USB Display	System Requirements	CPU Intel/AMD Dual Core 2 GHz or higher (ATOM not supported) Graphic card nVIDIA or ATI graphic card with 64MB VRAM or above OS Windows XP Professional SP2, Vista SP2, Windows 7 SP1 Wi-Fi 802.11n

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

GP10 Ultra Lite LED Projector

Distance Chart

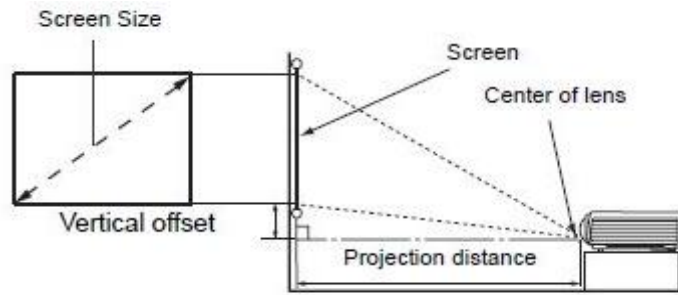

Screen Size				Projection Distance in mm	Vertical offset in mm
Diagonal		W (mm)	H (mm)		
Inches	mm				
30	762	646	404	750	0
40	1016	862	538	1000	0
50	1270	1077	673	1250	0
60	1524	1292	808	1500	0
80	2032	1723	1077	2000	0
100	2540	2154	1346	2500	0
120	3048	2585	1615	3000	0
150	3810	3231	2019	3750	0
200	5080	4308	2692	5000	0
220	5588	4739	2962	5500	0
250	6350	5385	3365	6250	0
300	7620	6462	4039	7500	0

Dimension

