

PD3225U | 32" 4K BenQ Designer Monitor

Make Inspirations Come Alive Across Devices Seamlessly

Connect to the PD3225U for seamless efficiency and unleash your creativity. With Thunderbolt 3 for data sync and device charging, furthermore offers precise Display P3, 4K resolution, a 2000:1 contrast ratio, and ergonomic design for comfort with HAS, tilt, swivel, and pivot flexibilities.



AQCOLOR[®]
Colors You Can Trust




Link Mac Displays

Thunderbolt 3 synchronizes images, videos, data seamlessly, and charge your Mac mobile devices all-in-one cable.

Colors You Can Trust

PD3225U covers 98% P3, 99% sRGB, and 99% Rec.709 color spaces and has amazing Delta E ≤ 2 which ensures superb accuracy and absolute color confidence.

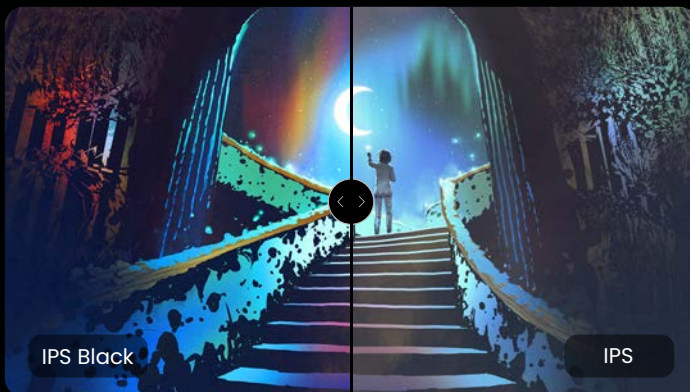

2000:1 IPS Black Technology

Explore brilliance with the 2000:1 IPS Black Tech for deep blacks and exceptional contrast, elevating your visual experience.



Wide Connectivity

Equipped with Thunderbolt 3, HDMI, DisplayPort, USB-C ports, and a hub. Easily set up KVM, connect Hotkey Puck G2, headphones, and external storage for productivity.



Because it matters

Model Name	PD3225U
Screen Size	31.5
Aspect Ratio	16:9
Panel Type	IPS
Resolution (max.)	3840x2160
Viewing Angle (L/R) (CR>=10)	178°/178°
Brightness (typ.)	400
Brightness (peak)(HDR)	400
HDR	HDR10 / VESA DisplayHDR 400
Color Gamut	98% P3; 99% Rec.709; 99% sRGB
Native Contrast	2000:1
Color Temperature	5000K; 6500K; 9300K; User Define
Gamma	1.8 - 2.6, sRGB
Display Mode	1:1; Aspect Ratio; Full
PPI	140
Display Colors	1.07 billion colors
Display Area	697.3 x 392.2
Display Screen Coating	Anti-Glare
Pixel Pitch	0.182
Color Bit	10
HDCP	2.2
AMA	Yes
Color Mode	Animation; B+W; CAD/CAM; Darkroom; DCI-P3; DICOM; Display P3; HDR; Low Blue Light; M-Book; Rec.709; sRGB; User
Built-in Speaker	2.5W x 2
Headphone Jack	Yes
Voltage Rating	100 - 240V
Power Consumption (sleep mode)	<0.5
Power Supply	Built-in
Power Delivery(USB C / Thunderbolt 3)	85W
Tilt (down/up)	-5° - 20°
Swivel (left/right)	30°/30°
Pivot	90°
Height Adjustment Stand	150
VESA Wall Mount	100 x 100
Dimensions (HxWxD) (mm)	478.4 - 628.4 x 714.8 x 273.3
Dimensions (HxWxD) (inch)	18.83 - 24.74 x 28.14 x 10.76
Net Weight (kg / lb)	8.2kg / 18.1lbs
Gross Weight (kg)	13.4
Power Cable	1.8
Signal Cable	DP1.2; HDMI (v2.0); Thunderbolt 4(1m); USB 3.2
Other Accessories	Calibration Report; Hotkey Puck G2; IO Cover; QSG; Safety Instruction; Warranty Card
HDMI (v2.0)	2
DisplayPort (v1.4)	1
Thunderbolt 3 (PowerDelivery 85W, DisplayPort Alt Mode, Data)	1
Thunderbolt 3 out (PowerDelivery 15W)	1
USB 3.2 (Downstream)	3
USB Type B (Upstream)	1
USB C (Downstream)	1
Daisy Chain Technology	Thunderbolt 3
All-in-One Connection	Thunderbolt 3
Mac Compatible	Yes
Windows® WHQL	Windows®10;Windows®11
Solidworks	Yes
Calman verified	Yes
Pantone SkinTone™ Validated	Yes
Pantone Validated	Yes
TUV Certificate	Flicker-free; Low Blue Light
KVM Switch	Yes
Video Format Support	Yes
DualView	Yes
Auto Pivot	Yes
PIP/PBP	Yes
Hotkey Puck G2	Yes
Factory Calibration Report	Yes
FW update by USB	Yes
Delta E(avg)	≤2
Uniformity Technology	Yes
ICCsyntax	Yes
Operating Temperature	0°C - 40°C
Operating Humidity (non-condensing)	10% - 90%
Display Pilot 2	Yes
Display ColorTalk	Yes

